

TECHNICAL DATA SHEET

Ref. 500021

Unipolar thermoplastic
battery master switch
24VDC / 75A



GENERAL CHARACTERISTICS

Protection degree: IP67
Ambient temperature: -40°C to +85°C
Weight: 0.162 Kg approx.
Contacts: Copper
Connections: not polarized

FIELDS OF APPLICATION

Nautical, handling vehicles, industrial vehicles, agriculture machinery, industry...


POWER CIRCUIT

Connection: M10 terminals
Tightening torque: 1.2 +/- 0.1 daN·m
Type: D1 normally open
Nominal current: 75 A
Nominal voltage: 24 VDC
Max. capacity: 300 A during 5 seconds


PARTICULAR CHARACTERISTICS:

Marine
Security key control


Size diagrams

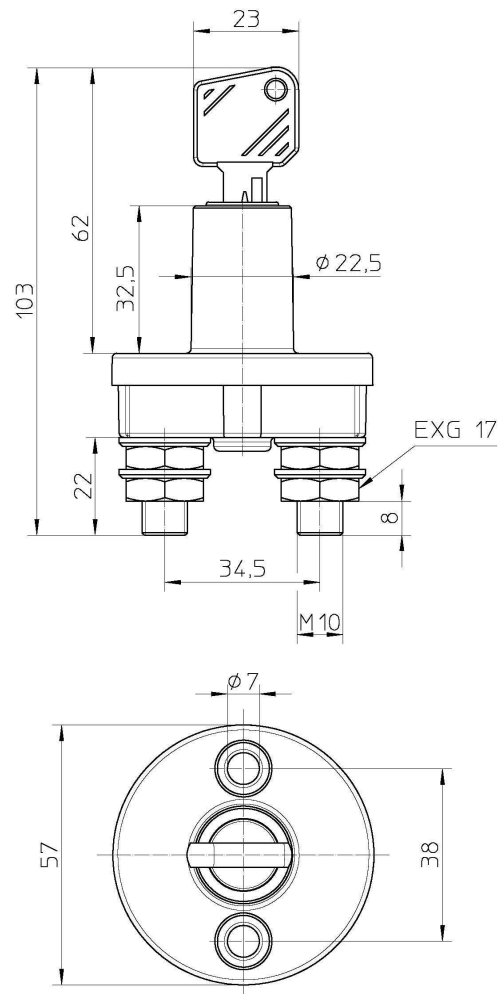

Connection diagram



Fixing diagram

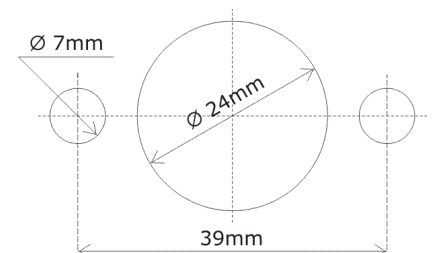

P.I. Llinars Park, C/ TECNOLOGIA, 82, NAVE N°7
08450 LLINARS DEL VALLÈS
BARCELONA (SPAIN)
Tel. : + 34.93.732.35.91 - Fax : + 34.93.732.35.90
WWW.CORMAR.ES - info@cormar.es