

# M24 SLD G FT

## SPECIFICATIONS

|                              |                                    |
|------------------------------|------------------------------------|
| Nominal Voltage (V)          | 12V                                |
| Capacity at C/100            | 84.5 Ah                            |
| Capacity at C/20             | 73.6 Ah                            |
| Capacity at C/5              | 63 Ah                              |
| Weight                       | 51.5 lbs. (23 kg)                  |
| Plate Alloy                  | Lead Calcium                       |
| Posts                        | Epoxy Seal Threaded Brass Post     |
| Container/Cover              | Polypropylene                      |
| Operating Temperature Range  | -76°F (-60°C) - 140°F (60°C)       |
| Charge Voltage @ 77°F (25°C) |                                    |
| Cycle                        | 13.8 - 14.6 volts                  |
| Float                        | 13.4 - 13.6 volts                  |
| Vent                         | Self-sealing                       |
| Electrolyte                  | Sulfuric acid thixotropic gel      |
| Terminal                     | C (Insert w/ 1/4" - 20 round hole) |



Rated non-spillable by ICAO, IATA and DOT

Made in the U.S.A. by East Penn Manufacturing Co, Inc.

## Valve-Regulated, Gelled-Electrolyte Battery



## DIMENSIONS


*Inches (mm)*

Length 10.20 (259 mm)

Width 6.80 (173 mm)

Height 8.24 (209 mm)  
*Including terminal*

**Gel Cycle Life vs Depth of Discharge at +25°C (77°F)**  
Based on BCI 2-hour Capacity

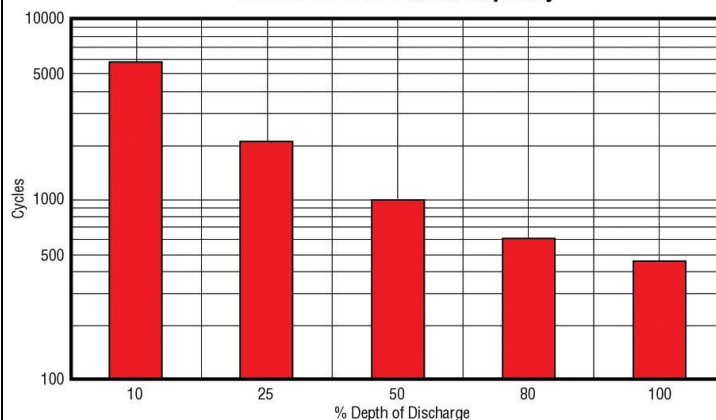

**MK Battery**

1631 South Sinclair Street • Anaheim, California 92806

Toll Free: 800-372-9253 • Fax: 714-937-0818 • E-mail: [sales@mkbattery.com](mailto:sales@mkbattery.com)

