



## Yuasa Technical Data Sheet

### Yuasa YBX5020 - YBX5000 Silver High Performance SMF Batteries

\* Due to unprecedented demand following the easing of COVID-19 lockdown measures, this product may be supplied without a state of charge indicator and not conform to the level of roll over protection advertised. Product performance and quality are not affected by this. Please check battery labels for specification details.

#### Performance

Voltage	12V
Capacity (20-hour)	110Ah
Cold Cranking Amps (EN1)	950A

#### Dimensions

Length	393mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	26.3kg
-----------------------	--------



#### Container Features

Case Type	L6 DIN
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Lid Type	SMF Double Lid


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Recommended Charge Rate	6A
Performance Marking	W4-C2-V3-E1

#### Terminal Type

##### T1


Standard DIN Post

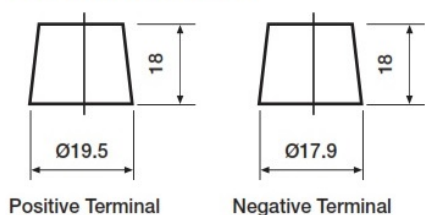


Positive Terminal

Negative Terminal

#### Cell Assembly Layout

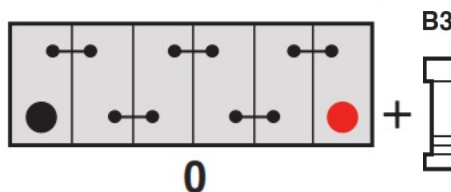

#### Battery Hold-down

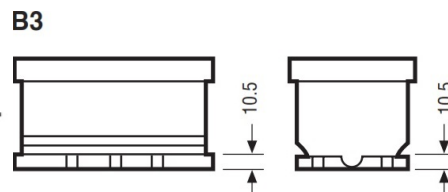

Data Sheet generated on 29/04/2024 - E&OE